


**Jim Hutchinson**  
Jim's Classic Auto  
Winter Park, Florida

*"I own three 18-foot Cheetahs -  
they really work beautiful,  
every one of them."*



**Mike Adamson**  
Finishing Touches Auto Body  
Sapulpa, Oklahoma

*"I've had the Star-A-Liner for 10 years  
and I don't see why it won't go  
another 10 years."*

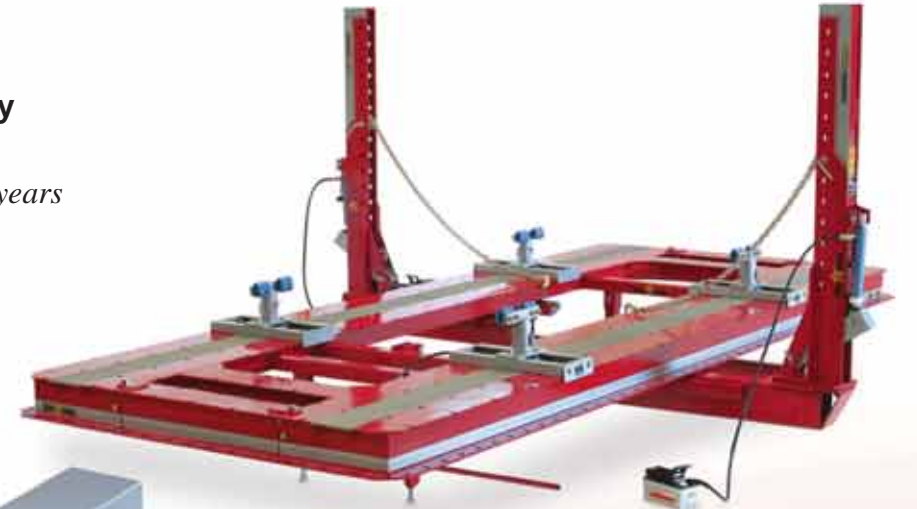


Accessories?  
WWW.STARALINER.COM



# Simply Fast

**Judy and Chuck**  
C&J Auto Sales  
Morristown, Indiana

*"The oldest of our four machines  
is nine years old and we've never had  
any problems with any of them."*

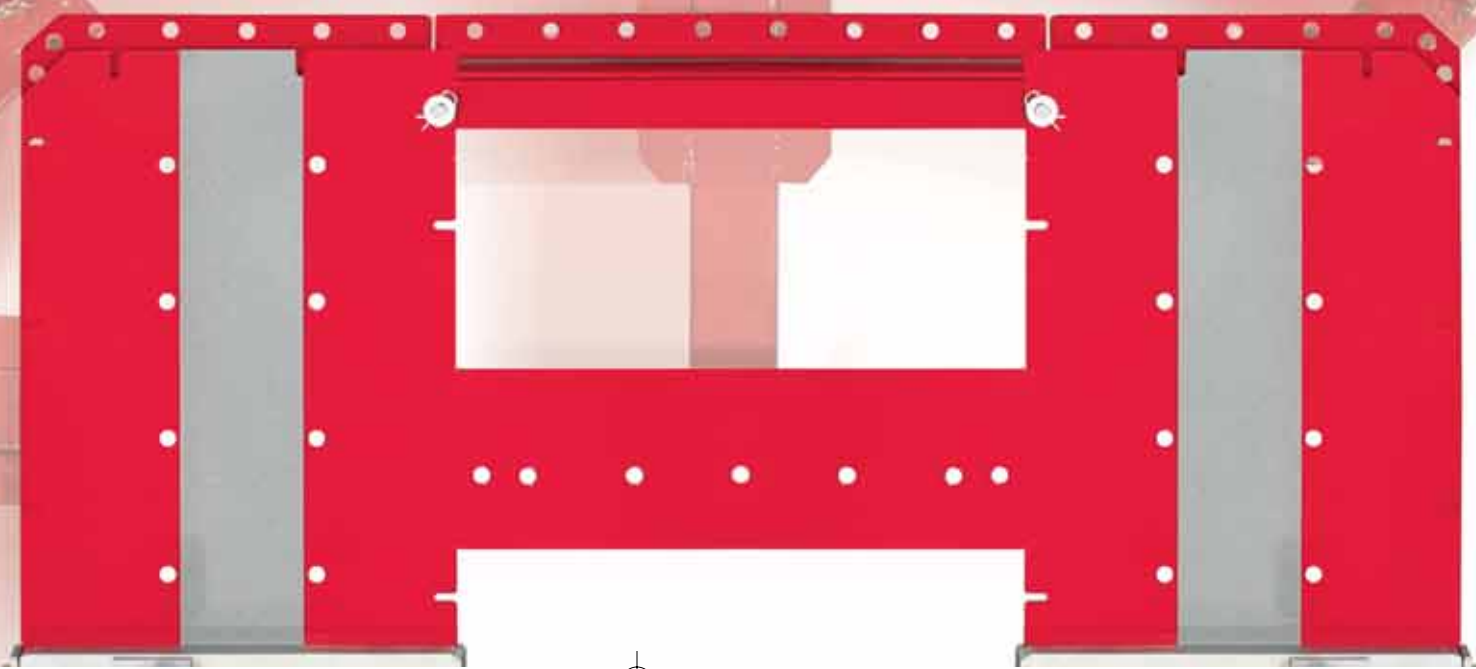

SIMPLY CALL TODAY  
1-800-445-8244  
WWW.STARALINER.COM






**Specifications**

	cheetah® 360 II	cheetah® 18	cheetah® sf 18	cheetah® sf 20	cheetah® 5500	cheetah® 5500 20	cheetah® series 20	cheetah® series 24
Length of bed (top)	15 ft. (457 cm)	18 ft. (548 cm)	18 ft. (549 cm)	20 ft. (610 cm)	18 ft. (549 cm)	20 ft. (610 cm)	20 ft. (610 cm)	24 ft. (732 cm)
Length w/towers extended	20 ft. 9 in. (632 cm)	23 ft. 9 in. (724 cm)	23 ft. 9 in. (724 cm)	25 ft. 10 in. (785 cm)	26 ft. 6 in. (808 cm)	29 ft. 2 in. (899 cm)	25 ft. 10 in. (787 cm)	29 ft. 10 in. (909 cm)
Width of bed	84 in. (213 cm)	84 in. (213 cm)	84 in. (213 cm)	92 in. (234 cm)	84 in. (213 cm)	84 in. (213 cm)	92 in. (234)	92 in. (234)
Width w/towers extended	13 ft. 4 in. (406 cm)	13 ft. 4 in. (406 cm)	13 ft. 4 in. (406 cm)	13 ft. 4 in. (406 cm)	16 ft. (488 cm)	16 ft. (488 cm)	14 ft. (427 cm)	14 ft. (427 cm)
Width of treadway	24 in. (61 cm)	24 in. (61 cm)	24 in. (61 cm)	28 in. (71 cm)	24 in. (61 cm)	24 in. (61 cm)	28 in. (71 cm)	28 in. (71 cm)
Width between treadway	36 in. (91 cm)	36 in. (91 cm)	36 in. (91 cm)	36 in. (91 cm)	36 in. (91 cm)	36 in. (91 cm)	36 in. (91 cm)	36 in. (91 cm)
Overall height	6 ft. 6 in. (198 cm)	7 ft. 9 in. (236 cm)	7 ft. 11 in. (236 cm)	7 ft. 11 in. (236 cm)	7 ft. 8 in. (234 cm)	7 ft. 8 in. (234 cm)	8 ft. 6 in. (259 cm)	8 ft. 6 in. (259 cm)
Tower height	5 ft. (152 cm)	6 ft. (183 cm)	6 ft. (183 cm)	6 ft. (183 cm)	6 ft. (183 cm)	6 ft. (183 cm)	6 ft. 8 in. (203 cm)	6 ft. 8 in. (203 cm)
Working height	24 in. (61 cm)	24 in. (61 cm)	26 in. (66 cm)	26 in. (66 cm)	24 in. (61 cm)	24 in. (61 cm)	24 in. (61 cm)	24 in. (61 cm)
Weight	3780 lbs. (1715 kilos)	4400 lbs. (1995 kilos)	4800 lbs. (2177 kilos)	5500 lbs. (2495 kilos)	5500 lbs. (2495 kilos)	6840 lbs. (3103 kilos)	6560 lbs. (2975 kilos)	7680 lbs. (3484 kilos)
Power required for hydraulics	100 psi air (6.89 bar)	100 psi air (6.89 bar)	100 psi air (6.89 bar)	100 psi air (6.89 bar)	air or electric	air or electric	100 psi air (6.89 bar)	100 psi air (6.89 bar)
Pulling power, hydraulics	10 ton (9 metric tons)	10 ton (9 metric tons)	10 ton (9 metric tons)	10 ton (9 metric tons)	10 ton (9 metric tons)	10 ton (9 metric tons)	10 ton (9 metric tons)	10 ton (9 metric tons)
Pulling radius	360 degrees	360 degrees	360 degrees	360 degrees	360 degrees	360 degrees	360 degrees	360 degrees

Specifications subject to change without notice. Made in the USA

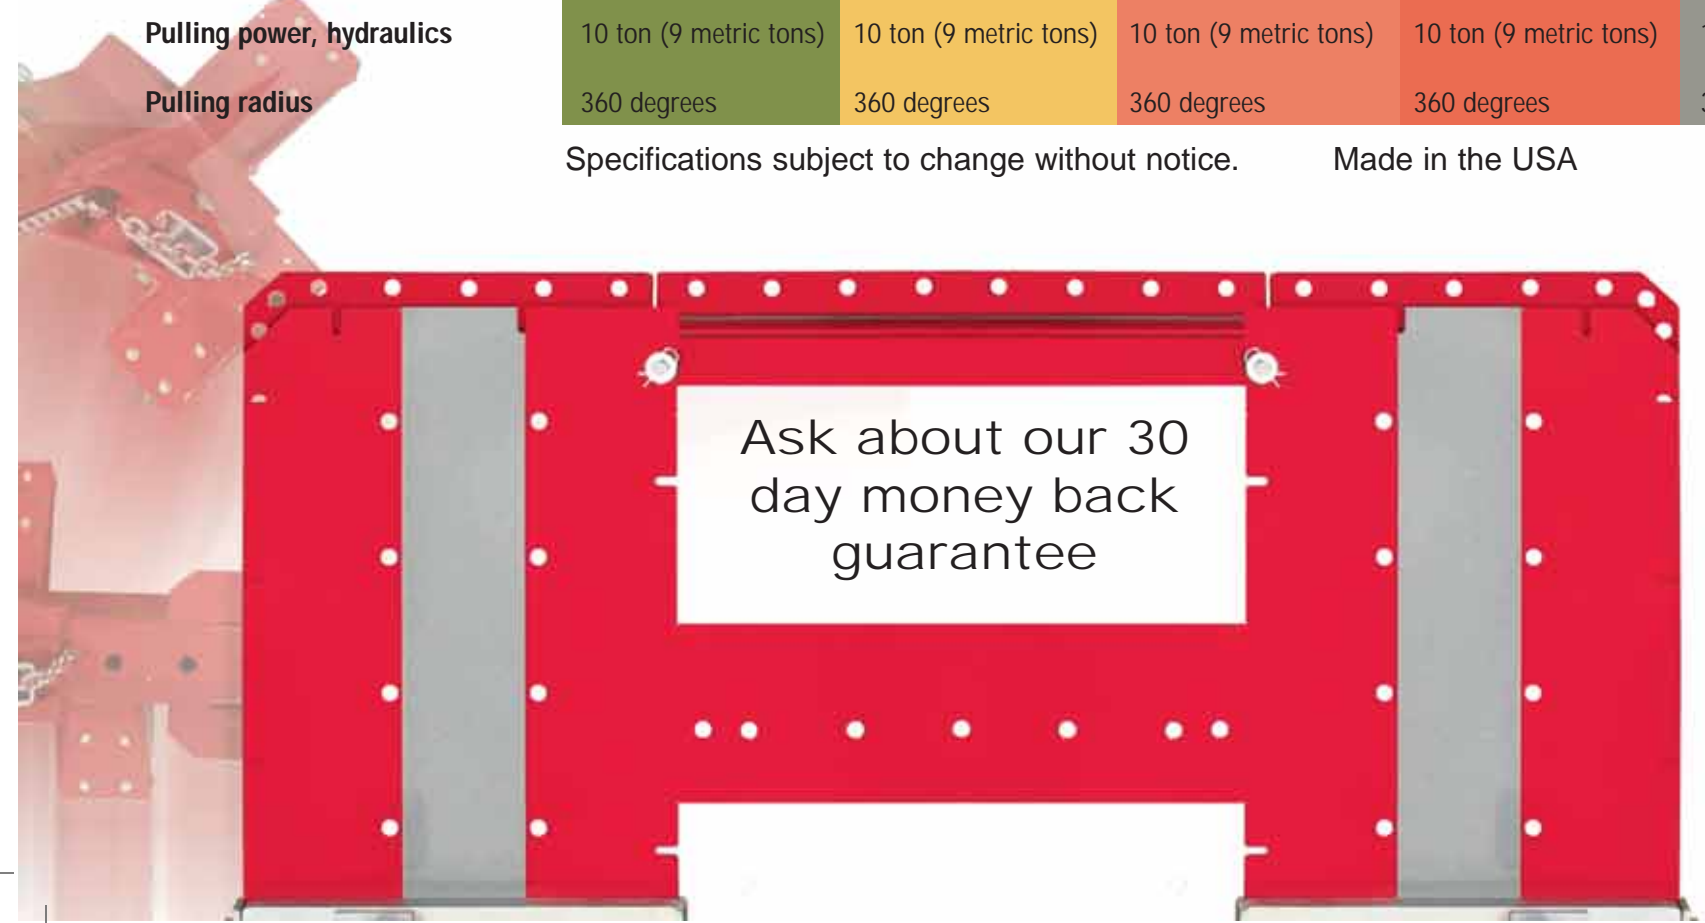

**STARALINER™**  
 1-800-445-8244  
 CJJ, Inc.  
 1210 Fortune Ave.  
 P.O. Box 480  
 Detroit Lakes, MN 56502  
 1-218-847-2608  
 © CJJ, Inc. 2003 All Rights Reserved  
 All brands and names are the property of their respective owners.



**STARALINER™**  
 1-800-445-8244  
 WWW.STARALINER.COM